

M/s MEZZAN QATAR Kind Attn: Mr Hossam Eldaly Maintenance Manager D: +974 4 452 4155 M: +974 6651 3409 E: hossam.eldaly@mezzan.com	QREF 17/12/24-12 Subject: Design, Supply, Installation, Testing & Commissioning of Package AC Units for <u>Chips Factory Warehouse</u> Location : INDUSTRIAL AREA
DATE : 17/12/2024	Email: mes@mes.qa

Dear Sir,

With reference to your inquiry concerning Design, Supply, Installation, Testing & Commissioning of Package AC Units, we would like to submit our proposal, which took into consideration all your requirements for this project's scope of work. **Attached the covered Areas.**

Scope of works:

1. Design, Supply, Installation, testing and commissioning of **2 nos. PACKAGED air** conditioning units. (Brand: **COOLEX KUWAIT or SKM UAE**) to maintain +25 C deg temperature
2. Supply & Installation **Textile Duct lines to cover the target areas** for proper air distribution inside the warehouse. Outside duct will be **GI Duct** with Thermobreak Insulation.
3. All holes to be properly fixed and sealed.
4. Provide necessary Lifting Equipment & Scaffolds for installation.
5. Provide concrete plinth for all AC units.
6. Testing & Commissioning of the above.

Excluding: Any Electrical works to feed the units. Dismantling of racking system or shifting any stored materials will be client responsibility to enable proper installation of AC systems and related components.

Warranty: 1 year full + 4 additional years for compressors



BOQ – CHIPS FACTORY

DESCRIPTION	QTY	UNIT PRICE	TOTAL
1) Supply & Installation of PACKAGE ACs made by COOLEX KUWAIT OR SKM UAE 2 NOS SPU540 PACKAGE Ac (SEE ATTACHED DRAWING)	2	250,000	500,000
2) Supply & Installation of Textile Duct (Internal duct)	LS	INCLUDED	INCLUDED
3) Supply & Installation of GI duct (external duct) with Thermobreak Insulation	LS	INCLUDED	INCLUDED
4) Plinth for AC units	LS	INCLUDED	INCLUDED
5) Testing & Commissioning	LS	INCLUDED	INCLUDED
LUMP SUM PRICE FOR ABOVE WORKS =		500,000 Q.R.	

Delivery Time: 12 → 14 weeks from advanced payment date & PTW

Offer Validity: This proposal is valid for 15 days


Payment Terms:

- 1-40% advance payment.
- 2-25% upon delivering the ACs to site
- 3-25% against invoices related to the progress of works.
- 4-5% against testing and commissioning
- 5- 5% retention to be paid after one year.

Assuring you our professional cooperation

METRI ENGINEERING SERVICES W.L.L



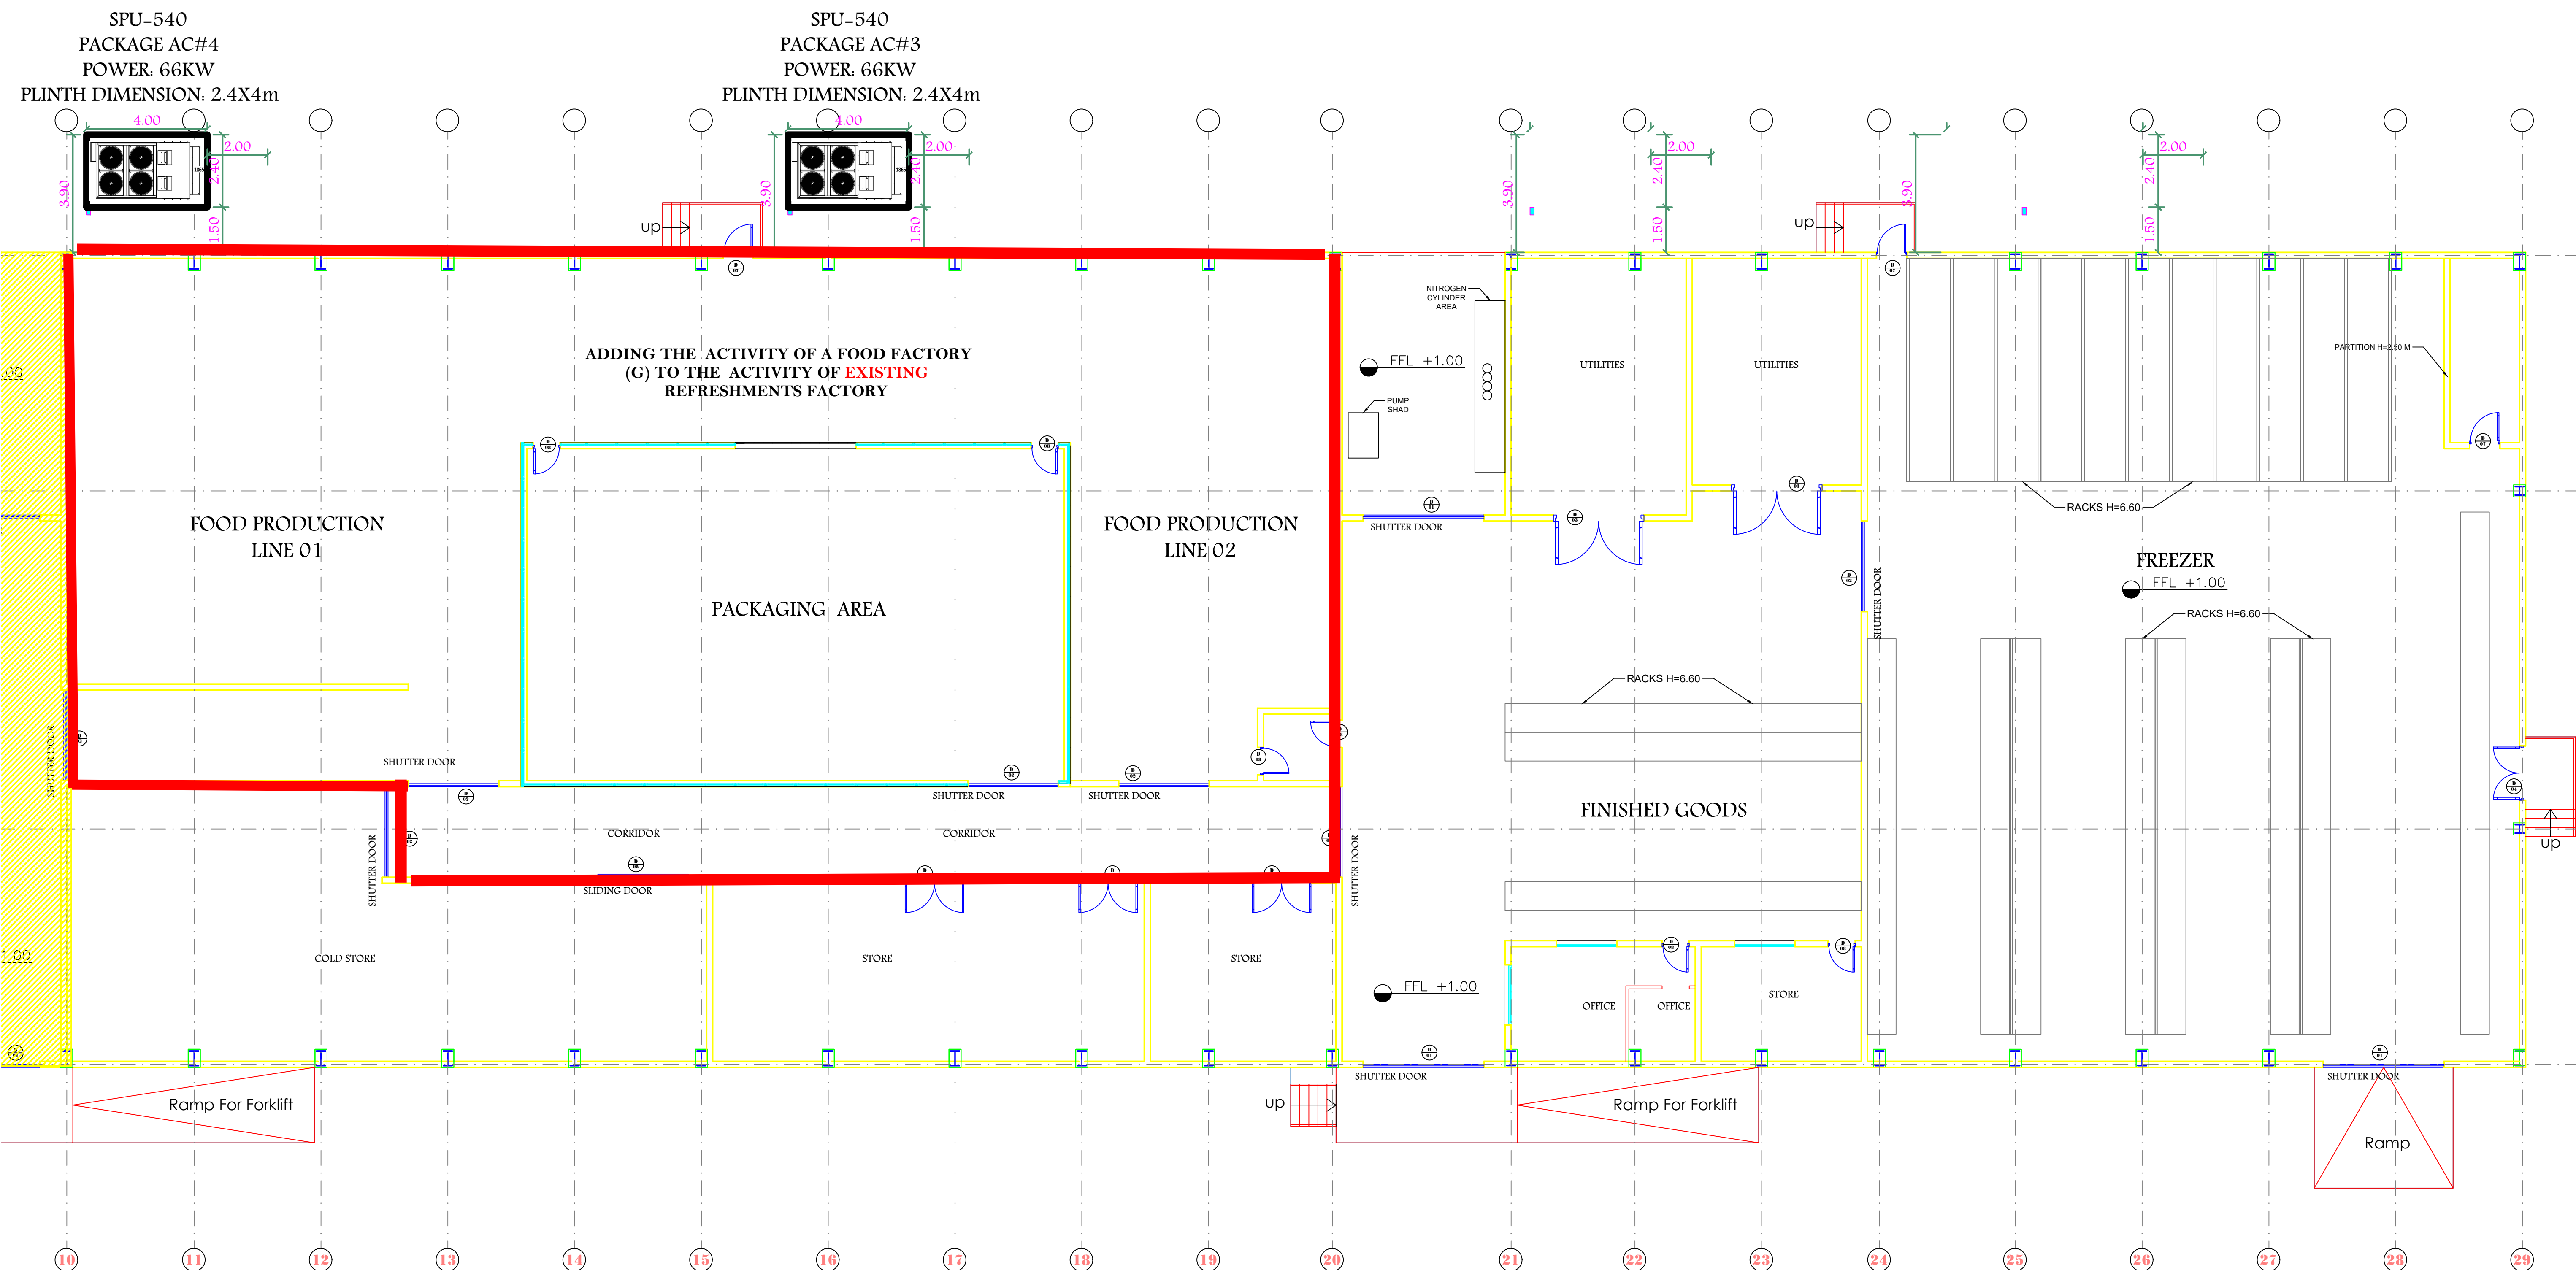

GROUND FLOOR PLAN