

M/s Gulf Warehousing Company	QREF 14/10/25-1 Subject: <u>COMMERCIAL</u>: 2000187433 Supply & installation of Textile & GI ducting for Two PACU units in MWH7-B warehouse. Location : MWH07-B Warehouse - LVQ
DATE: 14/10/2025	Email: mes@mes.qa

Dear Sir,

With reference to your inquiry concerning Supply & installation of Textile & GI ducting for Two PACU units in MWH7-B warehouse. at LVQ, we would like to submit our proposal, which took into consideration all your requirements for this project's scope of work.

Scope of works:

1. Installation, testing and commissioning of **2 nos. PACKAGED** air conditioning (Brand: **SKM**) (**SUPPLIED BY GWC**).
2. Supply & installation of 2 lines of textiles duct (Brand : EUROAIR DENMARK) as per the attached layout
3. Modify concrete plinth to suit the new package ACs.
4. Block Wall opening and closing.
5. Provide Drainpipes and connect to nearest point.
6. Electrical Works (Supply & Installation of 2 nos new Metal Enclosed Isolators on the roof and feed the new package acs with necessary cables, cables trays and related accessories.
7. Supply & Installation of Thermostats
8. Supply & Installation of Motorized Fire Dampers .Interfacing of Package ACs and Fire Dampers. Supply & Installation of electrical works and interfacing with existing fire panel.
9. Provide necessary Lifting Equipment & Scaffolds for dismantling & installation.
10. Testing & Commissioning of the above.



Excluding:

- 1) Dismantling of racking if needed or shifting of any stored materials.
- 2) Any issue found in the provided package ACs during testing & commissioning is not in our scope.
- 3) Any repairs/modifications/ warranty for the provided units is not in our scope.
- 4) Anything not mentioned clearly.

Warranty: 400 days only for the items supplied & installed by us. Any item not supplied by us has no warranty.

BOQ

MWH 7 - B					
SL No	Description	Unit	Quantity	Rate (QAR)	Amount (QAR)
1	METAL DUCTS - Supply, installation, testing, commissioning, and handing over the following works: Galvanized sheet metal duct work for the supply, return, exhaust, duct, fresh air intake complete with hangers, supports, insulation, flexible connections, flexible duct, spring hanger plenums' box, mixing box, aluminum jacket cladding for exposed duct, and all accessories in GI sheet of Gauge 20	Nos	2	20,000	40,000
2	Textile Ducts (Scope: Supply & Installation) - Design, Supply, Installation, testing & commissioning, and handing over the following works: Textile duct work for the supply complete with hangers supports and all accessories. EUROAIR DENMARK (see attached textile duct drawing)	Nos	2	18,000	36,000
3	Installation Testing & Commissioning of PACU - Make: SKM, Modification of Plinth & Necessary supports, Electrical & Mechanical works Replacement of Existing Isolator + new cable from isolator to unit + cable tray Replacement of MCCB by new one Modification of plinth Block Wall opening for Supply & Return + Proper sealing Drain Pipes to nearest drain point	Nos	2	9,000	18,000
4	SITC of Fire damper & Interfacing with existing building fire system including cabling and interfacing with existing fire panel Motorized Fire Dampers with modules and connection to existing FACP including cabling	Nos	4	7,500	30,000
5	Supply & Installation of Thermostat for PACU	Nos	2	1,500	3,000
6	Submission of closeout documents & handing over of the project	Nos	1	6,000	6,000
7	Lifting equipment crane	LS	1	1,500	1,500
				Total=	134,500

Delivery Time: 6 weeks from advanced payment date & PTW

Offer Validity: This proposal is valid for 90 days


Payment Terms: 40% Advance along with PO


60% Progress Invoice

Assuring you our professional cooperation

METRI ENGINEERING SERVICES W.L.L



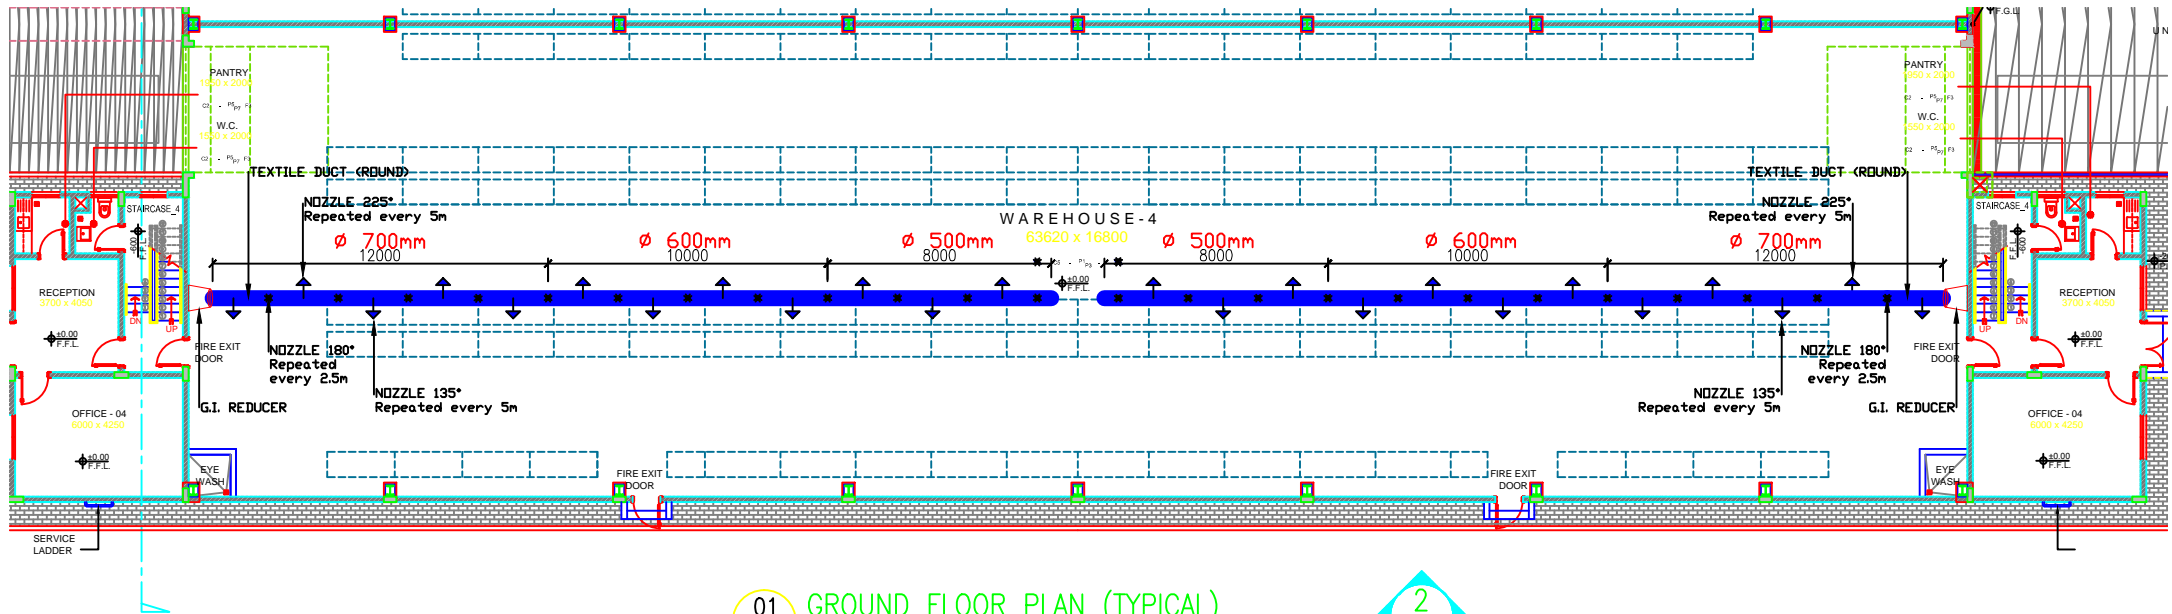

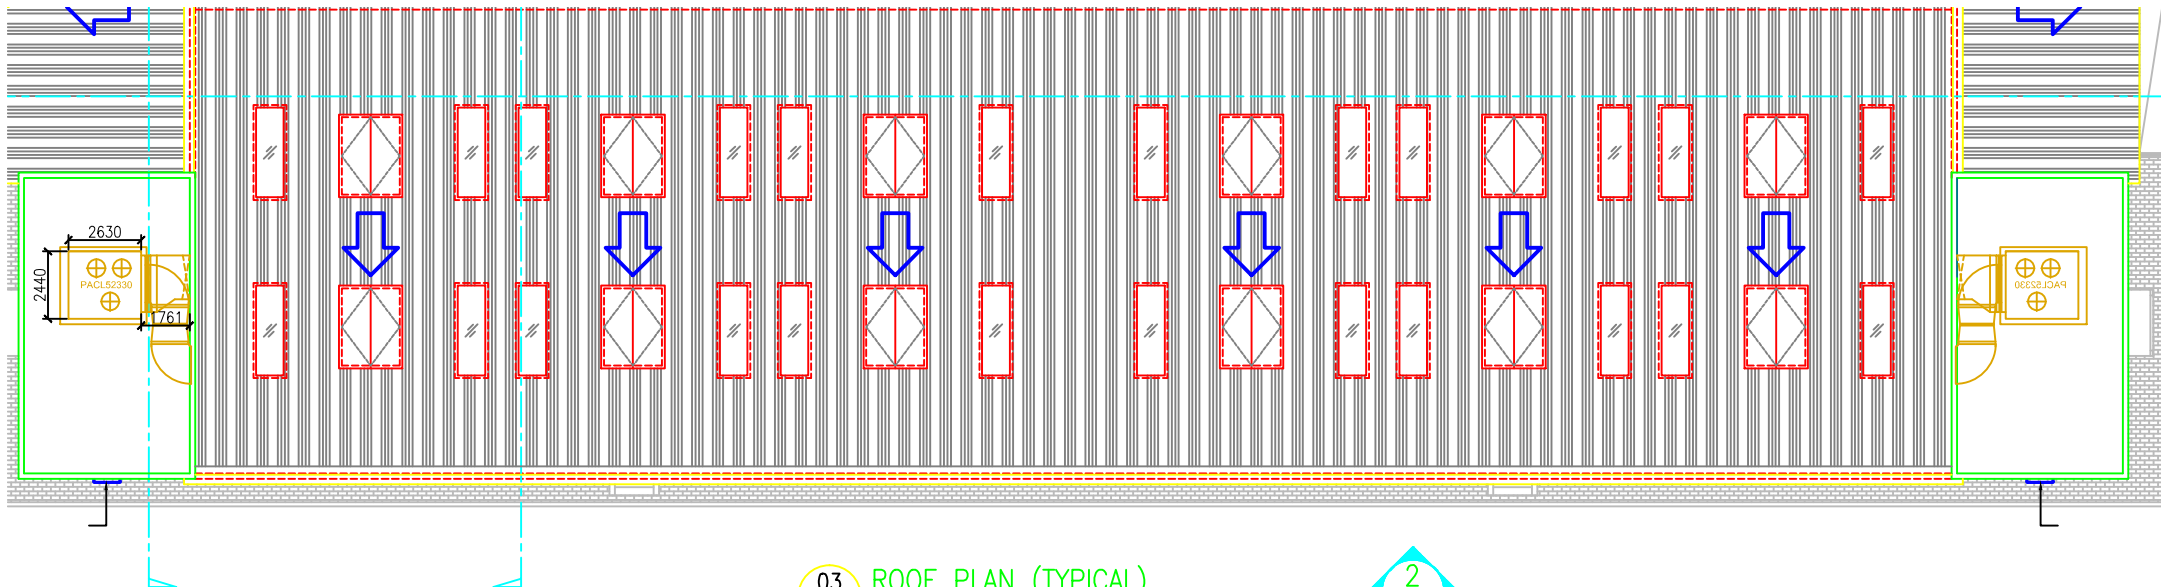

03 ROOF PLAN (TYPICAL)
SCALE : 1:150m