

QUOTATION

HVAC Rectification Works — 2nd Floor ESM Offices

Client	Ebn Sina Medical (ESM)
Project	HVAC Rectification — Manager's Office & Meeting Room
Site	Aamal Tower, Doha — Qatar
Quotation Ref.	MES/ESM/HVAC-QT/2026-015
Reference Assessment	MES/ESM/HVAC-AR/2026-014
Date	11 June 2026
Validity	30 days from date of issue

1. Introduction

Following our technical assessment of the cooling deficiencies on the 2nd floor (Ref. MES/ESM/HVAC-AR/2026-014), Metri Engineering Services W.L.L. is pleased to submit this quotation for the remediation of the Manager's Office and Meeting Room. The proposed works restore correct airflow & cooling and provide each space with dedicated, independently controlled cooling.

2. Scope of Work

2.1 Meeting Room

1. Dismantle and remove the existing restrictive 8-inch duct section.
2. Supply and install new PIR duct with a proper splitter, tapped from the existing main supply duct.
3. Supply and install PIR ductwork as two branches, each fitted with its own VAV box and actuator.
4. Connect both VAVs to a single, unified thermostat for simplified and balanced control of the room.

2.2 Manager's Office

The office is presently served from an AHU that does not belong to the ESM offices, and the cooling shortfall cannot be corrected through the existing connection. The works below provide a dedicated feed from the ESM-allocated AHU:

5. Disconnect and cancel the existing (non-ESM) duct connection serving the office.
6. Provide a new dedicated supply connection from the ESM-allocated AHU, including the necessary VAV box, actuator and ductwork.
7. Install a dedicated thermostat to give the office independent temperature control.

2.3 Builder's & Finishing Work

8. Gypsum ceiling cutting, modification and making-good (rectification) associated with the above works is included.

2.4 Testing, Adjusting & Balancing (TAB)

9. On completion, MES will carry out air balancing to confirm each supply diffuser delivers its design CFM and that comfort is restored across the affected spaces.

3. Bill of Quantities

The following materials are covered under the lump-sum price. Quantities are indicative of the works described above.

Sr.	Description	Unit	Qty
1	PIR duct & accessories (supply ductwork, splitter, fittings, insulation, supports)	Lot	1
2	VAV box	Nos	3
3	VAV actuator	Nos	3
4	Thermostat	Nos	2
5	Return grille	Nos	1
6	Return diffuser	Nos	2
7	Volume control damper (VCD)	Nos	1
8	Flexible duct (10 inch)	Box	1
9	Gypsum ceiling cutting & making-good	Lot	1

4. Commercial Summary

Description	Amount (QAR)
Lump-sum price for the scope of work above	19,000.00
Less: Special discount	(3,000.00)
Net price	16,000.00

Net price in words: Sixteen Thousand Qatari Riyals only (QAR 16,000).

5. Payment Terms

- 50% advance payment with confirmation of the order.
- 50% balance against completion of the works.

6. General Conditions

- Prices are in Qatari Riyals (QAR) and are quoted on a lump-sum basis for the scope stated above.
- Any work not expressly listed in the scope of work is excluded.
- Site access, power supply and safe working clearance to be provided by the client during execution.

- Works to be executed during mutually agreed working hours.
- This quotation is valid for 30 days from the date of issue.


Metri Engineering Services W.L.L.



4. Proposed System Layout.

For your reference, the diagram below outlines the proposed technical configuration for new duct and VAV Arrangement.

1) Meeting Room - Air Supply and VAV Configuration

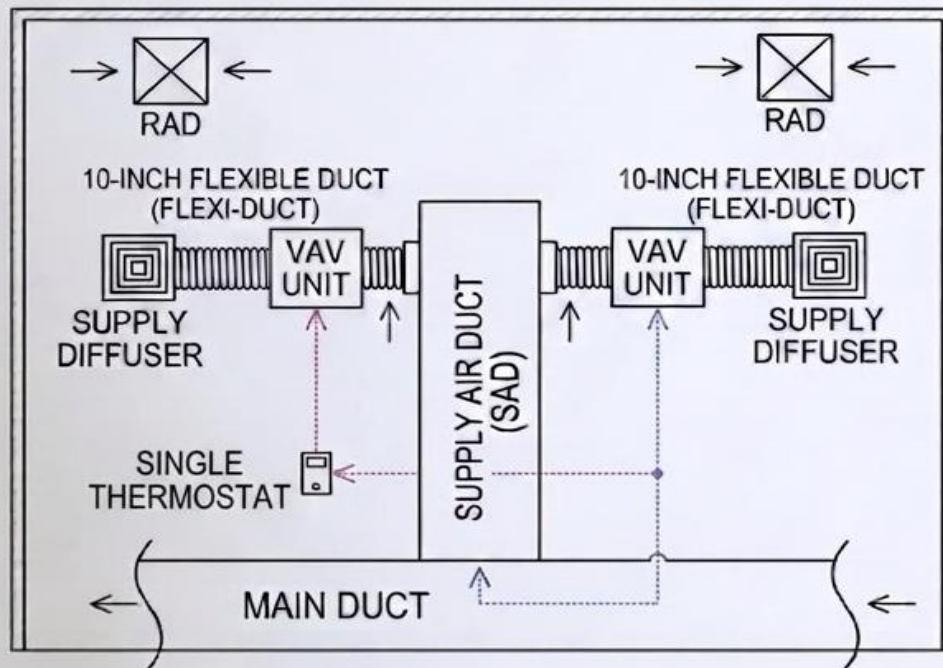

2) Manager's Office - Cooling Feed Modification

