



M/s Lusail International Circuit

Kind Attn: Mr. Amr Hussain

E-Mail: amr.hussain@lscs.qa

Mobile: +97477988486

QREF 17/06/2026-12

Subject: **Design, Supply, Installation of AC System in 3 Workshops.**

Ref No: LIC-FOPR-SIACW-100626 -R0

Project Location : Lusail International Circuit (LIC).

Site : Workshop Building 01, 02 & 03.

DATE : 17/06/2026


Email: mes@mes.qa

Dear Sir,

With reference to your inquiry concerning **Scope of Work: Design, Supply, Installation of AC System in 3 Workshops at LIC**, we would like to submit our proposal, which took into consideration all your requirements for this project's scope of works.

Scope of works:

1. Supply & Installation, testing and commissioning of 11 nos. PACKAGED air conditioning **(Brand: Packaged Unit (Frimec) – Made in Malaysia HIGH EFFICEIENCY PACKAGE AC) Ex-Stock Currently.**

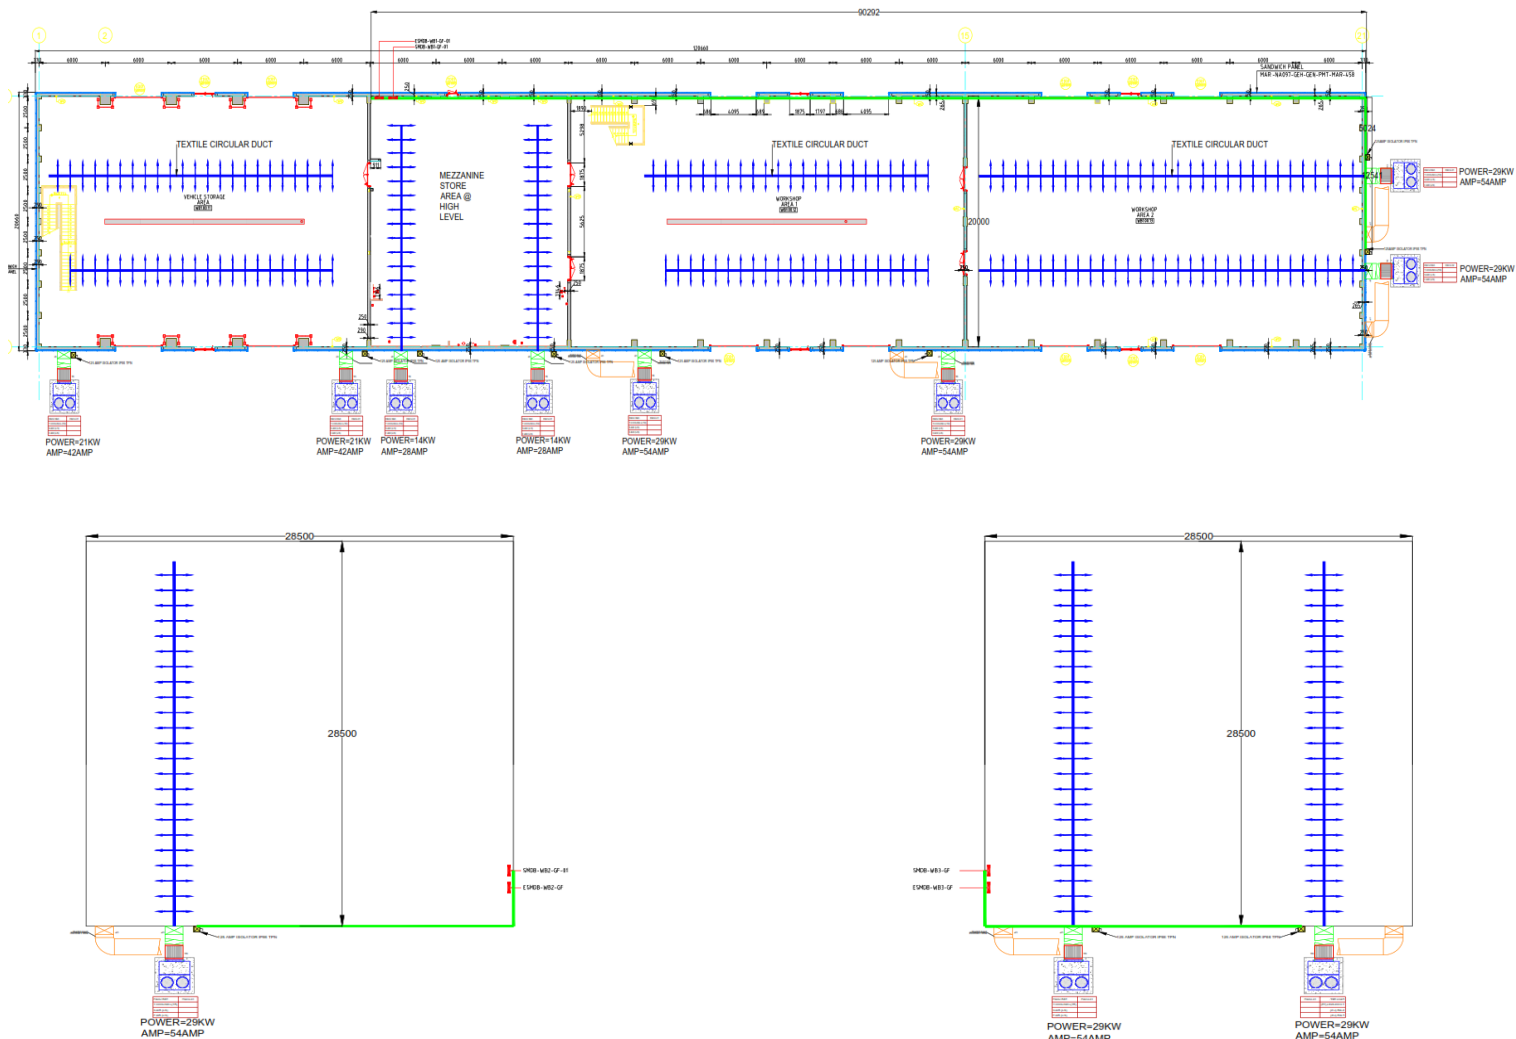

2. Supply & Installation Textile Duct lines along the whole warehouse (AS PER ATTACHED SKETCH) for proper air distribution inside the warehouse. Supply & Installation of Outside duct will be GI Duct insulated by THERMOBREAK duct insulation.
3. Provide 11 nos. concrete plinth to place the package ACs.
4. All wall holes to be properly fixed and sealed.
5. Electrical works related (from existing DB @ Electrical Room till package ACs, Cabling, Isolators. Provide the necessary modification of the existing panel and outgoing MCCBs to feed the package ACs Necessary Cables, Cable trays/trunks Weatherproof Isolators.
6. Provide necessary Scaffolds for installation.
7. Supply & Installation of Motorized Fire Dampers for Return Duct & Fusible Fire Dampers for Supply Duct.
8. Fire Interface modules for the Package ACs with the existing Fire Control Panel
9. Fire Interface modules for the Roof Fans with the existing Fire Control Panel
10. Testing & Commissioning of the above.

Excluding: Dismantling of racking system or shifting any stored materials inside/outside.

Warranty: 1 year full + 4 additional years for compressors only against manufacturing defects.



BOO PER AREA

Building#1			
VEHICLE STORAGE AREA		2 PACKAGE ACs	
DESCRIPTION	QTY	Unit Price	Total Price
1) Supply & Installation of 2 nos. PACKAGED air conditioning (Brand: FIRMEC) HI EER PACKAGE including Thermostat and control wiring	2	55,000	110,000
2) Supply & Installation of Textile Circular Duct (Internal duct) as per duct layout for 2nos Package Acs to cover the area	2	24,000	48,000
3) Supply & Installation of GI duct (external duct) with THERMOBREAK Duct Insulation for exposed duct.	2	18,000	36,000
4) Construction of Foundation base for 2 nos package ACs	2	3,500	7,000
5) Electrical works related from Existing SMDB PANEL @ Electrical Room which is suitable to take extra load till Package ACs including cables, Isolators, necessary Cable trays/trunks Weatherproof Isolators.	LS	75,000	75,000
6) Supply & Installation of Motorized Fire Dampers for Return Duct & Fusible Fire Damper for Supply Duct.	LS	36,000	36,000
7) Fire Interface modules for the Package ACs with the existing Fire Control Panel	LS	10,000	10,000
8) Fire Interface modules for the Roof Fans with the existing Fire Control Panel so the fans will work only by command from Fire Panel	LS	10,000	10,000
9) Testing & Commissioning	LS	10,000	10,000
Total PRICE Q.R.=			342,000

Note: The area above offices where the VRF outdoor units are located and the louvers are open to outside ambient air need to be isolated thermally, so we suggest closing the by PUR Sandwich Panel 10cm thickness

****Supply & Installation of 10 cm PUR Sandwich Panels along the width 21m x 4 meter height (2 sides)= 168m² x 150 Q.R. = 25,200 Q.R.**





BOO PER AREA

Building#1			
MEZZANINE STORE AREA @ HIGH LEVEL		2 PACKAGE ACs	
DESCRIPTION	QTY	Unit Price	Total Price
1) Supply & Installation of 2 nos. PACKAGED air conditioning (Brand: FIRMEC) HI EER PACKAGE including Thermostat and control wiring	2	43,000	86,000
2) Supply & Installation of Textile Circular Duct (Internal duct) as per duct layout for 2nos Package Acs to cover the area	2	20,000	40,000
3) Supply & Installation of GI duct (external duct) with THERMOBREAK Duct Insulation for exposed duct.	2	15,000	30,000
4) Construction of Foundation base for 2 nos package ACs	2	3,500	7,000
5) Electrical works related from Existing SMDB PANEL @ Electrical Room which is suitable to take extra load till Package ACs including cables, Isolators, necessary Cable trays/trunks Weatherproof Isolators.	LS	70,000	70,000
6) Supply & Installation of Motorized Fire Dampers for Return Duct & Fusible Fire Damper for Supply Duct.	LS	36,000	36,000
7) Fire Interface modules for the Package ACs with the existing Fire Control Panel	LS	10,000	10,000
8) Fire Interface modules for the Roof Fans with the existing Fire Control Panel so the fans will work only by command from Fire Panel	LS	10,000	10,000
9) Testing & Commissioning	LS	10,000	10,000
Total PRICE Q.R.=			299,000



BOO PER AREA

Building#1			
AREA 1		2 PACKAGE ACs	
DESCRIPTION	QTY	Unit Price	Total Price
1) Supply & Installation of 2 nos. PACKAGED air conditioning (Brand: FIRMEC) HI EER PACKAGE including Thermostat and control wiring	2	70,000	140,000
2) Supply & Installation of Textile Circular Duct (Internal duct) as per duct layout for 2nos Package Acs to cover the area	2	27,500	55,000
3) Supply & Installation of GI duct (external duct) with THERMOBREAK Duct Insulation for exposed duct.	2	18,000	36,000
4) Construction of Foundation base for 2 nos package ACs	2	3,500	7,000
5) Electrical works related from Existing SMDB PANEL @ Electrical Room which is suitable to take extra load till Package ACs including cables, Isolators, necessary Cable trays/trunks Weatherproof Isolators.	LS	90,000	90,000
6) Supply & Installation of Motorized Fire Dampers for Return Duct & Fusible Fire Damper for Supply Duct.	LS	36,000	36,000
7) Fire Interface modules for the Package ACs with the existing Fire Control Panel	LS	10,000	10,000
8) Fire Interface modules for the Roof Fans with the existing Fire Control Panel so the fans will work only by command from Fire Panel	LS	10,000	10,000
9) Testing & Commissioning	LS	10,000	10,000
Total PRICE Q.R.=			394,000



BOO PER AREA

Building#1			
AREA 2		2 PACKAGE ACs	
DESCRIPTION	QTY	Unit Price	Total Price
1) Supply & Installation of 2 nos. PACKAGED air conditioning (Brand: FIRMEC) HI EER PACKAGE including Thermostat and control wiring	2	70,000	140,000
2) Supply & Installation of Textile Circular Duct (Internal duct) as per duct layout for 2nos Package Acs to cover the area	2	27,500	55,000
3) Supply & Installation of GI duct (external duct) with THERMOBREAK Duct Insulation for exposed duct.	2	18,000	36,000
4) Construction of Foundation base for 2 nos package ACs	2	3,500	7,000
5) Electrical works related from Existing SMDB PANEL @ Electrical Room which is suitable to take extra load till Package ACs including cables, Isolators, necessary Cable trays/trunks Weatherproof Isolators.	LS	120,000	120,000
6) Supply & Installation of Motorized Fire Dampers for Return Duct & Fusible Fire Damper for Supply Duct.	LS	36,000	36,000
7) Fire Interface modules for the Package ACs with the existing Fire Control Panel	LS	10,000	10,000
8) Fire Interface modules for the Roof Fans with the existing Fire Control Panel so the fans will work only by command from Fire Panel	LS	10,000	10,000
9) Testing & Commissioning	LS	10,000	10,000
Total PRICE Q.R.=			424,000



BOO PER AREA

Building#2 (one part is already air conditioned)		1 PACKAGE AC		
DESCRIPTION		QTY	Unit Price	Total Price
1) Supply & Installation of 2 nos. PACKAGED air conditioning (Brand: FIRMEC) HI EER PACKAGE including Thermostat and control wiring		1	70,000	70,000
2) Supply & Installation of Textile Circular Duct (Internal duct) as per duct layout for 2nos Package Acs to cover the area		1	27,500	27,500
3) Supply & Installation of GI duct (external duct) with THERMOBREAK Duct Insulation for exposed duct.		1	18,000	18,000
4) Construction of Foundation base for 2 nos package ACs		1	3,500	3,500
5) Electrical works related from Existing SMDB PANEL @ Electrical Room which is suitable to take extra load till Package ACs including cables, Isolators, necessary Cable trays/trunks Weatherproof Isolators.		LS	42,000	42,000
6) Supply & Installation of Motorized Fire Dampers for Return Duct & Fusible Fire Damper for Supply Duct.		LS	18,000	18,000
7) Fire Interface modules for the Package ACs with the existing Fire Control Panel		LS	5,000	5,000
8) Fire Interface modules for the Roof Fans with the existing Fire Control Panel so the fans will work only by command from Fire Panel		LS	5,000	5,000
9) Testing & Commissioning		LS	5,000	5,000
Total PRICE Q.R.=				194,000



BOO PER AREA

Building#3		2 PACKAGE AC		
DESCRIPTION		QTY	Unit Price	Total Price
1) Supply & Installation of 2 nos. PACKAGED air conditioning (Brand: FIRMEC) HI EER PACKAGE including Thermostat and control wiring		2	70,000	140,000
2) Supply & Installation of Textile Circular Duct (Internal duct) as per duct layout for 2nos Package Acs to cover the area		2	27,500	55,000
3) Supply & Installation of GI duct (external duct) with THERMOBREAK Duct Insulation for exposed duct.		2	18,000	36,000
4) Construction of Foundation base for 2 nos package ACs		2	3,500	7,000
5) Electrical works related from Existing SMDB PANEL @ Electrical Room which is suitable to take extra load till Package ACs including cables, Isolators, necessary Cable trays/trunks Weatherproof Isolators.		LS	65,000	65,000
6) Supply & Installation of Motorized Fire Dampers for Return Duct & Fusible Fire Damper for Supply Duct.		LS	36,000	36,000
7) Fire Interface modules for the Package ACs with the existing Fire Control Panel		LS	10,000	10,000
8) Fire Interface modules for the Roof Fans with the existing Fire Control Panel so the fans will work only by command from Fire Panel		LS	10,000	10,000
9) Testing & Commissioning		LS	10,000	10,000
Total PRICE Q.R.=				369,000

Delivery Time: 2 → 3 Months from advanced payment date & PTW

Offer Validity: This proposal is valid for 10 days

Warranty: 400 Days

Payment Terms:

- 50% Advance along with PO.
- 20% Upon Supply of Electrical Materials to site.
- 20% Upon Supply of AC Equipment to site.
- 10% Against Installation, Testing & Commissioning

Assuring you our professional cooperation

METRI ENGINEERING SERVICES W.L.L
Eng. Fayez 55572793

