To : M/s HSA MEP

From: ENGR. METRI

Attn : MR. Ahmad Mohammed

Mobile: +974 3320 4693

E-mail: procurement2@hsa-mep.com

Date : 1 October, 2026

Pages : 03

Sub : Design, Supply & Installation of Walk In Chiller room **Ref. #: 9810-1-rev2**

ENVIRONMENTAL LABORATORY

Dear Sir,

With reference to your inquiry, we are pleased to submit our proposal for your above requirements to wit:

SCOPE OF WORK : Design, Supply, installation, Testing & Commissioning of 1 no Walk in Chiller Room to maintain temperature(+4°C) at all times.

1nos Walk-in Chiller Room (+4°C)

EXTERNAL Dimensions : **3.7 mx 2.2m x 4m Height APPROX. (As per attached location)**
(PUR Wall & PUR Ceiling PANEL THICKNESS **100mm**)

Doors : 1no Single Leaf Hinged Door 0.9m x 1.9m with heater

Floor Insulation : 100mm PUR with checkered aluminum ontop

Refrigeration Units: 1no Condensing Unit DORIN ITALY or COPELAND + 1no Matching Evaporator ICEMAKE OR THERMOWAY

Refrigeration Unit Capacity : **AU-H201CC – Cooling Capacity= 4420 W (see attached)**

Sandwich Panel INSULATION : **PUR (POLYURTHANE) (Made in Qatar)**

THICKNESS : **100 mm**

CLADDING : **0.5 mm pre-painted GI sheets.**

CONSTRUCTION : Panels are joined together by means of tongue and groove and locked together on each side of the panel to ensure air tight joints .

DOOR ACCESSORIES : Door is complete with fittings and accessories and have the same finish and thickness as that of the walls and ceiling, complete with rubber gaskets, safety release handle.

Lighting : LED lights Included to provide the appropriate light levels for each cold store.

Ref. Accessories	:	All accessories such as expansion valve, solenoid, sight glass, pressure relief valves …etc are included
CONTROL PANEL 1 no. control panel for each cold room	:	Specially designed to control & secure the system. will be provided with necessary contactor, overload relay, signal lights…etc
PIPES	:	copper pipes are made by Muller Brass or Equivalent
M/ ACCESSORIES	:	Will be provided including rivets, internal and external flashing, silicon and hygienic plastic corners.
Excluding	:	**Electrical Power to be arranged by client at site & Any Civil Works.**

TOTAL PRICE FOR ABOVE + Control Panel = 67,000 Q.R.

PAYMENT TERMS	:	60% advance 20% upon delivery of cooling units 20% upon Completion
DELIVERY	:	1 months from the date of your firm order along with the receipt of down payment provided the site is ready for installation.
WARRANTY	:	1 year on all materials supplied and installed by MES + free preventive maintenance for the 1st year. Servicing other than MES authorized technician voids warranty. Sandwich Panels 5 years warranty.

NOTE :All civil works and main power EXCLUDED. Our work is limited to the above quoted. *Delay of delivery due to acts of 3rd party (non-availability of supply); site readiness; accidents will not be accounted to MES. Warranty does not cover force majeure, loss due to fire or damage due to natural calamities. MES will not be held liable for any damage on products or items inside the cold room.*

VALIDITY	:	30 days.

We trust the above quotation merits your attention and we look forward to serving your requirement soon. Should you need any further clarification, please do not hesitate to contact us.

Thanks & regards,


Metri Engineering Services W.L.L




Calculation - AU

Input

Model	AU-H201CC
Refrigerant	R404A
Evaporating temperature	-3.0 °C
Ambient temperature	46.0 °C
Reference temperature	Dew temperature
Suction temperature	20.0 °C
Evaporator outlet temperature	20.0 °C
Voltage / phases / frequency	380-420 V / 3 / 50 Hz



A = "CC" models only
B = Standard application
C = Head cooling fan or max superheating 20K
• = Dew temperature

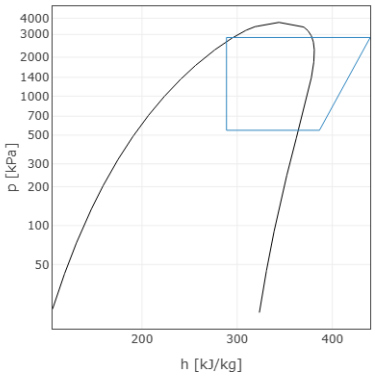


Performance calculation

	Standard conditions	At evaporator	At compressor
Cooling capacity	4110 W	4420 W	4420 W
Absorbed power including fans	3.08 kW	3.08 kW	3.08 kW
Condenser capacity	7.18 kW	7.32 kW	7.49 kW
COP	1.33	1.44	1.44
Mass flow	165.2 kg/h	165.2 kg/h	165.2 kg/h
Condensing temperature	59.5 °C	59.5 °C	59.5 °C
Liquid subcooling	0.0 K	3.0 K	3.0 K
Absorbed current	5.0 A	5.0 A	5.0 A
Max operating current	6.0 A	6.0 A	6.0 A
Locked rotor current	24.5 A	24.5 A	24.5 A

Technical data

Compressor model	H201CC	
Displacement @ 50 Hz	9.16	[m³/h]
Displacement @ 60 Hz	10.99	[m³/h]
Motorfans: Air Flow (tot.) @50Hz	2000.0	[m³/h]
Motorfans: Air Flow (tot.) @60Hz	2250.0	[m³/h]
Motorfans: Power @50Hz	1×165	n° × [W]
Motorfans: Power @60Hz	1×240	n° × [W]
Motorfans: Current consumption (tot.) @50Hz	0.75	[A]
Motorfans: Current consumption (tot.) @60Hz	0.99	[A]
Motorfans: Condenser capacity @50Hz	1×6	n° × µF
Motorfans: Condenser capacity @60Hz	1×6	n° × µF
Motorfans	1×350	n° × Ø
Receiver volume	2.3	[L]
Connections: Suction	16 s.	[mm]
Connections: Liquid	1/2"	
Net weight	69.0	[kg]
Sound pressure (free field) 1,8 m @50Hz	52.5	[dBA]
Sound pressure (free field) 1,8 m @60Hz	53.7	[dBA]
Sound pressure (free field) 5 m @50Hz	43.6	[dBA]
Sound pressure (free field) 5 m @60Hz	44.8	[dBA]
Sound power @50Hz	68.6	[dBA]
Sound power @60Hz	69.8	[dBA]

Overall dimensions [mm]

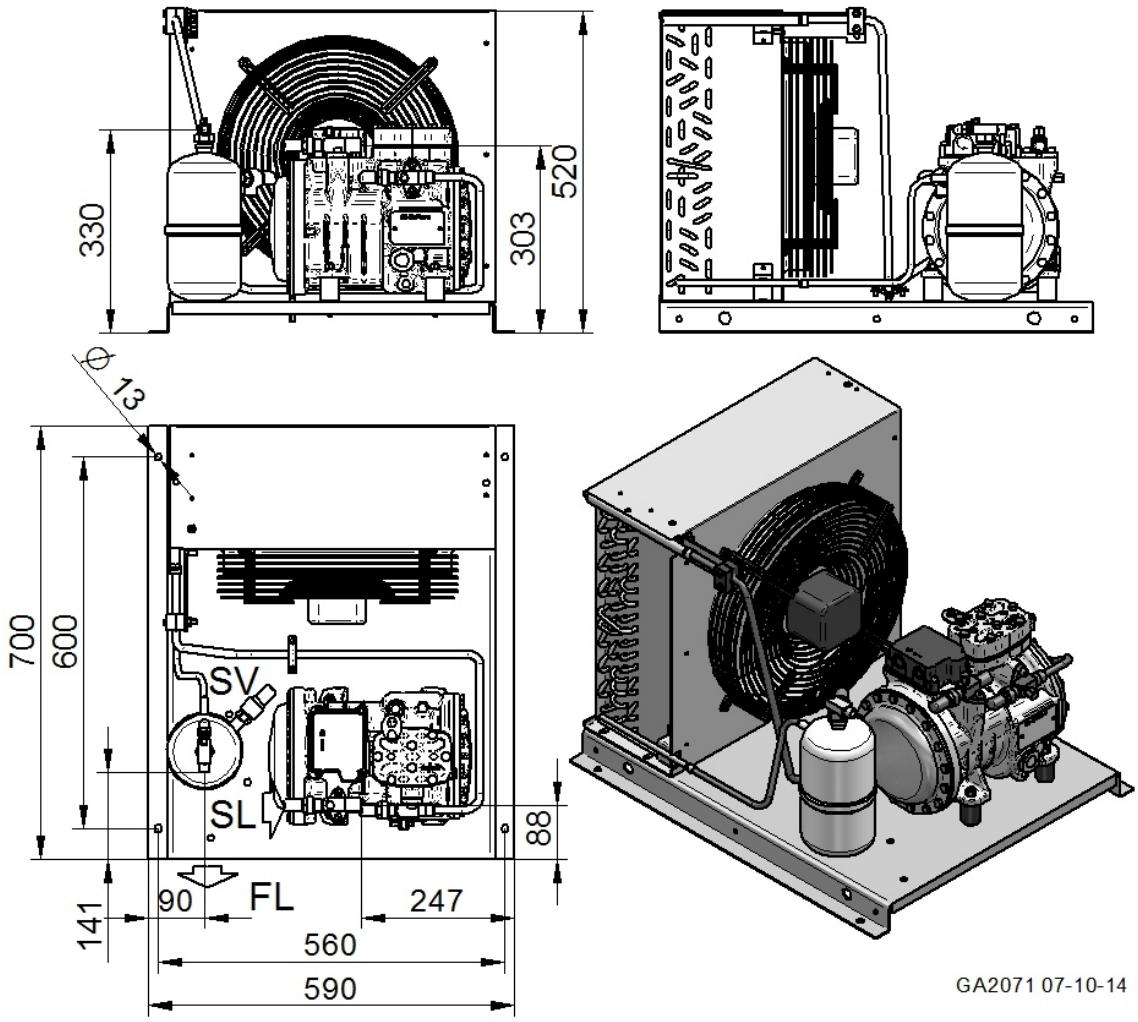

FL - Refrigerant outlet

SV - Safety valve

SL - Suction service valve